SINGLE - POINT TABLE TOP LOAD CELL



FEATURES:

- Single Point Capability with Minimum Off-centre Error
- Low Profile Bending Beam Load Cell Design
- Supports the Platform Size of 400 x 400 mm
- Moisture Proof Sealing for Harsh Environment

APPLICATIONS:

- Check Weighers
- Bagging Machines
- Bench, Counting & Postal Scales



A Joint venture with ARTECH INDUSTRIES INC., U.S.A.

DESCRIPTION:

Model 60510 is a Strain Gage based low profile bending beam Load Cell and is ideal for Bench, Counting, Floor, Postal and Retail Scales. It is designed for low eccentric load sensitivity. It is Constructed from Anodised Alluminum Alloy.

PERFORMANCE SPECIFICATION:

Standard Capacities (Kgf.) : 1.5, 2, 2.5, 3, 5, 10,15, 20, 30,

40, 50, 75, 100, 120 **Excitation Voltage**40, 50, 75, 100, 120

10 VDC-Maximum 15 VDC

Nominal Output : 2.0 mV/V

Non-Linearity : < ±0.025% FSO (Full Scale Output)

Hysteresis: $< \pm 0.02\%$ FSONon-Repeatability: $< \pm 0.01\%$ FSOCreep (30 minutes): $< \pm 0.03\%$ FSOZero Balance: $\pm 5.0\%$ FSOInput Resistance: 420 ± 15 OhmsOutput Resistance: 350 ± 3 Ohms

Insulation Resistance : > 1000 Mega Ohms at 50 VDC Safe Overload : 150% of Rated Capacity Ultimate Overload : 200 % of Rated Capacity

Temperature : 0-60° C

Compensated Range

Temperature Effect on Output: < 0.0015% FSO/ $^{\circ}$ CTemperature Effect on Zero: < 0.0020% FSO/ $^{\circ}$ CPlatter Size: $400 \text{ mm} \times 400 \text{ mm}$

Eccentric Load Effect : < 0.02% of FSO at 1/3 rated load placed at the edge of the specified size platter

Deflection : < 0.5 mm at FSO

Tightening Torque : 2 m. Kg.


Construction : Anodised Aluminium Alloy

Environmental Protection class: IP65







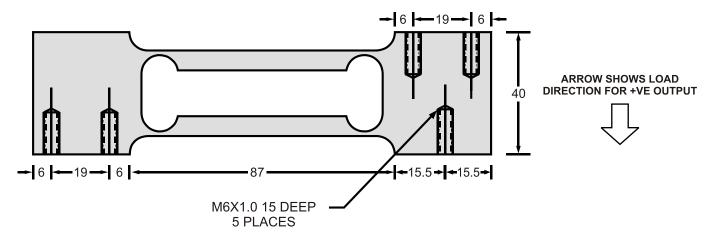

All dimensions are in mm.



SEEGATE CORPORATION

Swastik House, Building No.382, 3rd Floor, Room No.7, Near Lamington Road Police Station, Grant Road (E). Mumbai -400007.

Tel - 022-40044443 Mobile - 7021525891, 797338650 Email -sales@seegatecorp.com. Website - www.seegateloadcell.com

For more reference visit our website :- WWW.Seegatecorp.in