


Precision Balance

Johri Series

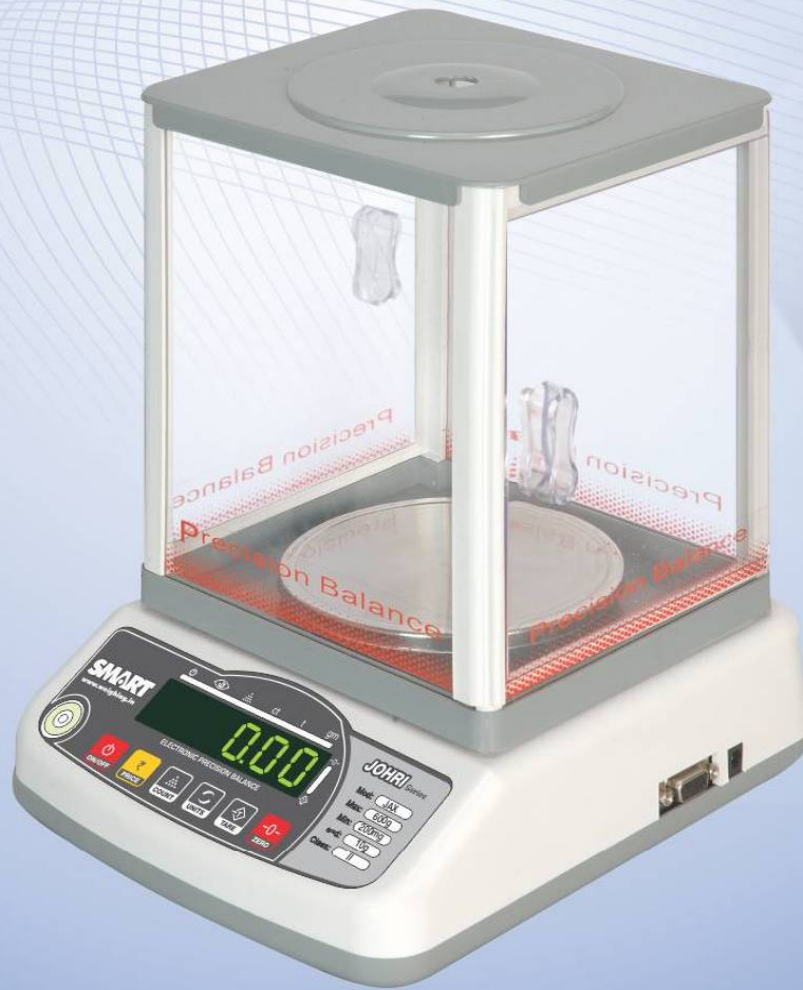

-  RS-232C Interface
-  External Calibration
-  Counting Function
-  SMTWTFSS
24 APR 2010
Date/Time
-  Rechargeable Battery
-  LED Display
-  Percentage Function
-  Direct Printing Function
-  GLP/ISO Reporting

Applications

- Gold weighing
- Laboratories
- GSM Calculation
- Gem & Jewelry
- Parts Counting

Features

- With thermal hardware compensation.
- Multiple weighing units & precise counting function.
- Units can be enabled or disabled as per country regulations.
- Full Tare Range, auto calibration, Auto Zero mode
- Price computing function. Scrolling price display
- Remote display, suitable for desktop mounting
- Low battery indication, Glow Control, Anti Vibration mode, Dummy Zero
- Draft Shield to reduce errors due to air movement
- Mains/rechargeable 6VAH battery operated. 40hrs backup
- RS232 / direct printing option. continuous / command control
- Date /Time option. GLP/ISO reporting
- INT-CAL intelligent single button user calibration procedure

Order Code	Capacity	Division	Display	Platter(mm)	Accessories
JAX-JH-100G1	100g	1mg	0.56" Large LED Display Red, VFD Green	70mm Ø	Remote Display Draft Shield Brass Wt 200g Date /Time RS-232 Printer Interface
JAX-JH-300G10	300g	10mg		120mm Ø	
JAX-JH-300G5	300g	5mg			
JAX-JH-600G10	600g	10mg			
JAX-JH-1000G10	1000g	10mg			
JAX-JH-1200G20	1200g	20mg			
Power Source : AC 110V/220V/240V (±10%) + DC 6V/4AH Rechargeable Battery Dimension : 251 x 232 x 189mm / Box Size : 353 x 295 x 190mm / Gross Wt : 3.5kg					



Receipt Printer



Label Printer